



**FortiHypervisor**  
Fortinet Hybrid Virtual Appliance



# FortiHypervisor

FortiHypervisor ISO, 90E, 500D and 2500E

Today, the ability to quickly deploy new branch services is hampered by the complexity and costs involved in bringing a new branch office or service online. Managed service providers (MSPs) find it challenging to maintain and upgrade multiple on-premises equipment for their enterprise customers. The operational complexity of managing multiple on-premises equipment can cause significant delays in time to deploy and market new services, reducing profitability.

Enterprises need the flexibility to adapt their branch offices to their changing business needs in a secure and fast manner. They need the ability to turn up new services on demand from a single platform without the cost and complexity of deploying and managing additional devices, expertise which most branch personnel do not have.

Network Function Virtualization (NFV) enables MSPs to deploy network services as virtualized functions that are decoupled from hardware and chained together, eliminating the need for multiple dedicated CPE. NFV centralizes and automates key operational processes such as service creation and provisioning, accelerating service delivery. NFV also opens the door to upsell additional services to create differentiation. Cloud-based service orchestration via NFV platforms reduces on-site provisioning, lowers costs and accelerates service delivery.

## Hardware Accelerated Hybrid Virtual Appliance

FortiHypervisor is making the promise of rapid service delivery a reality for enterprises and MSPs. Built to deliver virtualized services as virtual network functions (VNFs), FortiHypervisor consolidates advanced networking and security services on a single device, eliminating the need for multiple CPE while enabling on-demand service delivery. Both a pure software instance for generic x86 platforms and a FortiGate hardware-based hybrid appliance are available.

A powerful Intel processor combined with FortiASIC hardware acceleration delivers the high security performance that customers have come to expect from Fortinet. Ample storage and memory produce excellent compute, network and security performance.

## Features & Benefits

- KVM hypervisor-based appliance for customizable on-demand service delivery
- Consolidated networking, security and SD-WAN on a single device
- Choice of pure x86 and hardware accelerated approaches for different deployment needs
- Flexibility to deploy Fortinet and third-party VNFs
- Fortinet VNFs include NGFW, IPS, Web Filtering, Antivirus, Antispam, VPN, NAT, DHCP, routing and SD-WAN
- Centralized service orchestration and provisioning by SDN/NFV
- Multi-tenancy for economical hosting in the cloud



## SUPPORTED VNFs/VMs

FortiHypervisor supports the following VNFs/VMs. Other KVM-based VNFs/VMs may function correctly but have not been tested by Fortinet\*.

### Fortinet


FortiManager KVM 5.4.1  
FortiAnalyzer KVM 5.4.1  
FortiGate KVM 5.4.1  
FortiSandbox  
FortiWeb KVM 5.6.0  
FortiADC KVM 4.6.0  
FortiRecorder KVM 2.4.1  
FortiMail KVM 5.3.6  
FortiVoiceEnterprise KVM 5.3.3  
FortiCache 4.1.1

### Third Party

Windows Server 2012 R2  
Windows 10 Pro  
Windows 7 Pro  
CentOS 7  
Ubuntu 15.10  
Tiny Core Linux 6.4

\* Other VMs are being continuously tested, please review that latest release notes for the latest supported list.

## FEATURES

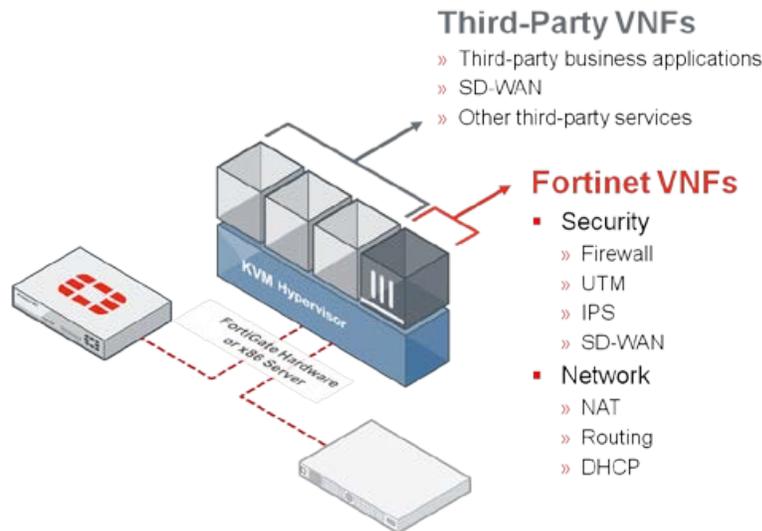

### NFV Architecture Benefits



- Software is decoupled from hardware
- Multiple services can be deployed on the same hardware
- Services are deployed as VNFs that are chained together
- Service creation and provisioning are centralized and automated
- New services can be added quickly
- Capex and Opex are reduced

## DEPLOYMENT

FortiHypervisor is available as a hybrid CPE running on FortiGate hardware, and a virtual CPE software instance that can be deployed on any generic x86 platform. FortiHypervisor supports the following on-premises and cloud-hosted use cases.

### MSP Hosted CPE (cloud)

- MSP cloud-hosted CPE deployment model
- Centralized service orchestration and provisioning by MSP via third-party SDN/NFV
- Can run Fortinet and third-party VNFs
- FortiGate VM available as VNF
- Multi-tenancy (customer separation) for economical hosting
- FortiGate hardware with FortiASIC acceleration and low latency

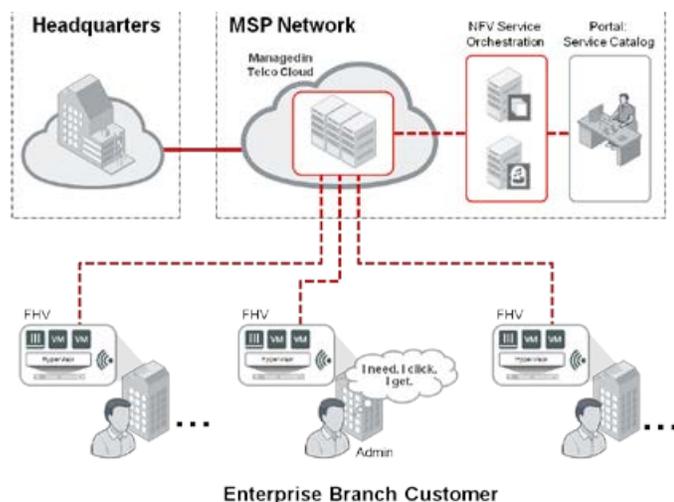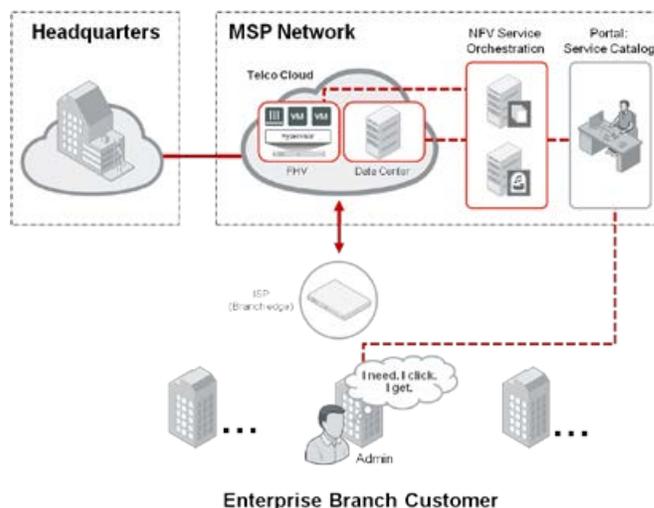


### On-premises MSP CPE

- On-premises universal CPE deployment model
- Centralized service orchestration and provisioning by MSP via third-party SDN/NFV
- Can run Fortinet and third-party VNFs
- FortiGate VM available as VNF
- FortiGate hardware with optional FortiASIC acceleration
- FortiExtender 3G/4G backup
- SD-WAN service

### Enterprise “branch in a box”

- Very large enterprise, distributed retail solution
- Single CPE can run multiple Fortinet and third-party services
- FortiGate VM available as VNF
- FortiGate hardware with optional FortiASIC acceleration
- Centralized service provisioning and management
- FortiExtender 3G/4G backup
- SD-WAN service

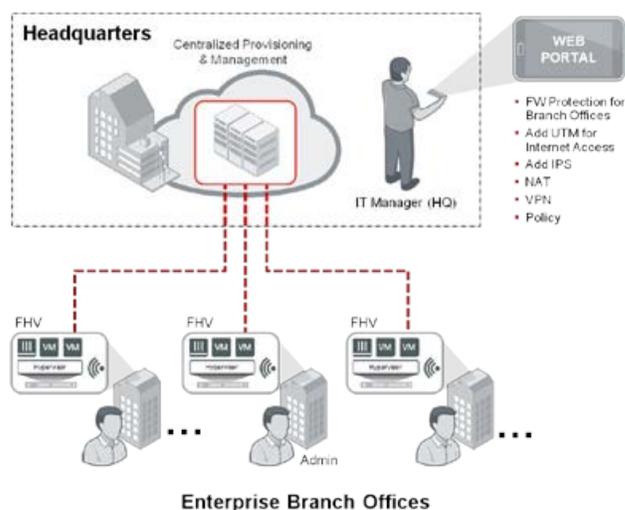

## DEPLOYMENT

### Performance Guidelines

The following table illustrates the performance of FortiGate VNF/VM running on the FortiHypervisor appliance.

	FortiHypervisor 90E	FortiHypervisor 500D	FortiHypervisor 2500E
<b>System Performance</b>			
Firewall Throughput (1518 / 512 / 64 byte UDP packets)	820 / 240 / 43 Mbps	16 / 16 / 9 Gbps	132 / 131 / 37 Gbps
Firewall Throughput (Packets Per Second)	64.5 Kpps	13.5 Mpps	55.5 Mpps
Firewall Latency (64 byte UDP packets)	100 µs	2.18 µs	1.26 µs
Concurrent Sessions (TCP)	3.3 Million	3.8 Million	17 Million
New Sessions/Second (TCP)	9,500	56,000	192,000
IPsec VPN Throughput (512 byte packets)	70 Mbps	14 Gbps	88 Gbps
SSL-VPN Throughput	60 Mbps	750 Mbps	2.2 Gbps
IPS Throughput (HTTP / Enterprise Mix)	277 Mbps / TBC	2.3 Gbps / 750 Mbps	14.6 Gbps / TBC
SSL Inspection Throughput	105 Mbps	850 Mbps	2.6 Gbps
Application Control	TBC	770 Mbps	TBC
Threat Protection Throughput	TBC	450 Mbps	TBC

Performance results obtained by running FortiGate VM on FortiHypervisor 500D, 90E and 2500E in an internal lab under ideal test conditions.

## SPECIFICATIONS

	FortiHypervisor 90E	FortiHypervisor 500D	FortiHypervisor 2500E
<b>System Specifications</b>			
Supported VMs	6	12	28
10/100/1000 Interfaces (Copper, RJ45)	14	10	32
SFP Interfaces	0	8	0
SFP+ Interfaces	0	0	10
Management/HA Interfaces (RJ45)	2	2	2
Included Transceivers	0	2x SFP (SX 10 GE)	2 SFP+ (SX 10 GE)
Internal Storage	1x 1 TB Hard Disk Drive	2x 2 TB Hard Disk Drive	2x 3 TB Hard Disk Drive
CPU Specification	2 cores, 2 threads, 1.7 GHz	4 cores, 4 threads, 3.2 GHz	6 cores, 12 threads, 3.5 GHz
Memory Size	8 GB	16 GB	32 GB
<b>Dimensions</b>			
Height x Width x Length (inches)	2.9 x 8.5 x 7.0	1.73 x 17.00 x 12.68	3.5 x 17.4 x 21.9
Height x Width x Length (mm)	73 x 216 x 179	44 x 432 x 322	88 x 442 x 555
Weight	4.7 lbs (2.1 kg)	10.8 lbs (4.9 kg)	36.5 lbs (16.6 kg)
<b>Environment</b>			
Form Factor	Desktop	1RU, Rack Mount	2RU, Rack Mount, Ears supplied, Rail optional
Power Source	100–240V AC, 60–50 Hz (External DC Power Adapter)	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz
Current (Max)	3A / 110V, 1.5A / 220V	4A / 110V, 2A / 220V	9A / 110V, 4.5A / 220V
Power Consumption (Average / Maximum)	30 W / 35 W	113 W / 202 W	312 W / 470 W
Heat Dissipation	100 BTU/h	690 BTU/h	1604 BTU/h
Operating Temperature	32–104°F (0–40°C)	32–104°F (0–40°C)	32–104°F (0–40°C)
Storage Temperature	-31–158°F (-35–75°C)	-31–158°F (-35–70°C)	-31–158°F (-35–70°C)
Humidity	20–95% non-condensing	5–95% non-condensing	20–95% non-condensing
Redundant Power Supplies	—	Supports FRPS-100	Dual Power Supply
<b>System</b>			
Management	CLI (SSH, Telnet, Console), HTTP/S	CLI (SSH, Telnet, Console), HTTP/S	CLI (SSH, Telnet, Console), HTTP/S
<b>Compliance</b>			
Safety Compliance	FCC Part 15 Class B, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class B, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class B, C-Tick, VCCI, CE, UL/cUL, CB

## ORDER INFORMATION

Product	SKU	Description
FortiHypervisor-ISO	FHV-ISO	FortiHypervisor Virtual Appliance ISO Image, installable on compatible x86 third-party hardware (contact Fortinet for compatibility list).
FortiHypervisor 90E	FHV-90E	Hybrid Virtual Appliance — 16x GE RJ45 ports (2x Mgmt/HA ports, 14x switch ports), 1 dual-core CPU, 8 GB RAM, 1 TB internal storage.
FortiHypervisor 500D	FHV-500D	Hybrid Virtual Appliance — 10x GE RJ45 ports, 8x GE SFP slots, FortiASIC accelerated, 1 quad-core CPU, 16 GB RAM, 4 TB internal storage.
FortiHypervisor 2500E	FHV-2500E	Hybrid Virtual Appliance — 34x GE RJ45 ports (2x Mgmt/HA ports, 32x switch ports), 10x GE SFP+ slots, FortiASIC accelerated, 1x 6-core CPU, 32 GB RAM, 6 TB internal storage.
Optional Accessory		
1 GE SFP LX Transceiver Module	FG-TRAN-LX	1 GE SFP LX transceiver module for all systems with SFP and SFP/SFP+ slots.
1 GE SFP RJ45 Transceiver Module	FG-TRAN-GC	1 GE SFP RJ45 transceiver module for all systems with SFP and SFP/SFP+ slots.
1 GE SFP SX Transceiver Module	FG-TRAN-SX	1 GE SFP SX transceiver module for all systems with SFP and SFP/SFP+ slots.

FortiGate VMs are not included in FortiHypervisor SKU and must be ordered separately. For more information on FortiGate VM, please refer to the datasheet at [https://www.fortinet.com/content/dam/fortinet/assets/data-sheets/FortiGate\\_VM.pdf](https://www.fortinet.com/content/dam/fortinet/assets/data-sheets/FortiGate_VM.pdf)  
 For more information on how to buy, please contact Fortinet, Tel: +1.408.235.7700, [www.fortinet.com/sales](http://www.fortinet.com/sales)



GLOBAL HEADQUARTERS  
 Fortinet Inc.  
 899 Kifer Road  
 Sunnyvale, CA 94086  
 United States  
 Tel: +1.408.235.7700  
[www.fortinet.com/sales](http://www.fortinet.com/sales)

EMEA SALES OFFICE  
 905 rue Albert Einstein,  
 Valbonne 06560,  
 Alpes-Maritimes, France  
 Tel: +33.4.8987.0500

APAC SALES OFFICE  
 300 Beach Road 20-01  
 The Concourse  
 Singapore 199555  
 Tel: +65.6395.2788

LATIN AMERICA SALES OFFICE  
 Sawgrass Lakes Center  
 13450 W. Sunrise Blvd. Suite 430  
 Sunrise, FL 33323  
 United States  
 Tel: +1.954.368.9990